


Quick-Start Guide

APPLIANCE ON/OFF MODULE

ApplianceLinc™ (#2456S3)

Your new Appliance Module allows you to remotely control any non-dimmable fluorescent light or appliance in your home at the touch of a button.

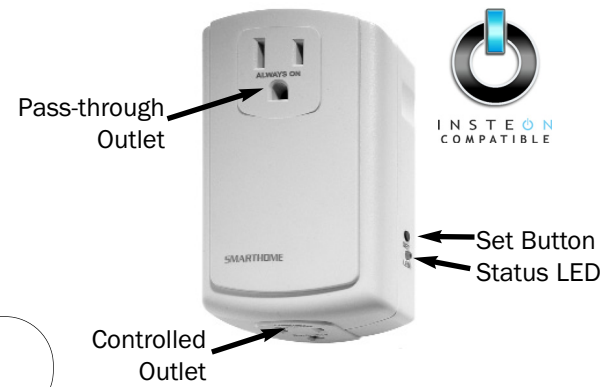

Need Help? For assistance call your friendly support person @ 866-243-8018

Installing Your Appliance On/Off Module

Step 1. Two Access Points™ (#2443) **must** be installed if your home does not already have them.

Step 2. Plug your appliance into the outlet at the **bottom** of the Appliance Module (labeled "Controlled").



HINTS

- Do not use an outlet controlled by a switch
- Be sure to leave the appliance's local switch in the on position

Step 3. Plug your Appliance Module into an unswitched wall outlet.

Step 4. If appliance is off, **turn it on.**

Step 5. Select the INSTEON Controller you would like to use and set it to Linking Mode. Refer to your INSTEON Controller's User's Guide for detailed instructions.

NOTE: The following will work for most INSTEON Controllers.

- On the INSTEON Controller, choose the ON/OFF Button Pair you want to use for controlling your Appliance Module.
- Set the INSTEON Controller to Linking Mode by pressing and holding the ON Button of the pair for 10 seconds.

Step 6. Press and hold the black Set Button on the Appliance Module for 3 seconds. The Appliance Module's led will blink once to confirm linking. Depending on the INSTEON Controller, you have about 4 minutes to perform this step before setup mode times out automatically.

Congratulations! You can now remotely control your appliance.

Notes

- The Appliance Module can be used with loads up to 15 amps or incandescent lighting up to 480 watts.
- To reset the Appliance Module to its original factory settings, unplug it from the wall outlet and wait 10 seconds. Press and hold its SET button, plug it back in, continue holding the SET button for 3 seconds and release. After several seconds, the Status LED will turn on, indicating a reset is complete.
- The advanced User's Guide with more details can be found at www.smarthome.com/2456s3.html.

Quick-Start Guide

Appliance On/Off Module

ApplianceLinc™ (#2456S3)



INST E N
COMPATIBLE

Need Help? For assistance call your friendly support person @ 866-243-8018

Optional If You Own an X10 Device

How to give your Appliance Module an X10 address.

1. Press and hold the Appliance Module's SET button for 3 seconds, then release.
The Status LED will begin blinking.
2. Send the X10 address followed by an "ON" **THREE TIMES** from any X10 Controller within 30 seconds.
The Appliance Module's status led will blink then remain steadily on.

How to remove an X10 address from your Appliance Module.

1. Press and hold the Appliance Module's SET button for 3 seconds, then release.
Press and hold the Appliance Module's SET button again for 3 seconds, then release.
The Status LED will begin blinking.
2. Send the X10 address followed by an "OFF" **THREE TIMES** from any X10 Controller within 30 seconds.
The Appliance Module's status led will blink then remain steadily on.

SmartLabs Limited Warranty

SmartLabs warrants to the original consumer of this product that, for a period of two years from the date of purchase, this product will be free from defects in material and workmanship and will perform in substantial conformity to the description of the product in the owner's manual. This warranty shall not apply to defects or errors caused by misuse or neglect.